


NOTE:

1. ALL WELDING TO AS 1554.1 CAT SP
2. ALL WELDS 8mm CFW
3. ALL STEEL PLATE TO AS 3678
4. ALL HOLLOW SECTIONS TO AS 1163 GRD350
5. 35T GRD "S" SAFETY BOW SHACKLES TOP & BOTTOM
6. LIFTING SLING APEX ANGLE 60 DEGREES
7. PROOF LOAD & MARKINGS TO AS 4991
8. TARE WEIGHT 460KGS

LUG CENTRES	WLL AS LIFT BEAM	WLL AS SPREADER BEAM
4000	6.5T	60T
4500	6.0T	60T
5000	5.4T	60T
5500	4.9T	60T
6000	4.5T	60T

ITEM NO.	PART NUMBER	QTY.
1	OUTER BEAM	1
2	GUIDE PLATE	2
3	INNER BEAM	2
4	END LUGS	2
5	END LUG CHEEK PLATE	8
6	END CAPS	2
7	INNER BEAM GUIDE PLATE	2
8	LIFT LUG BASE PLATE	1
9	LIFT LIG	1
10	LOCATION PIN	2
11	FRONT GUIDE PLATE	2
12	M10 x 35 BUTTON HEAD CAP SCREW	16
13	SPLIT LINK	2
14	HANDLE FOR 50mm PINS	2

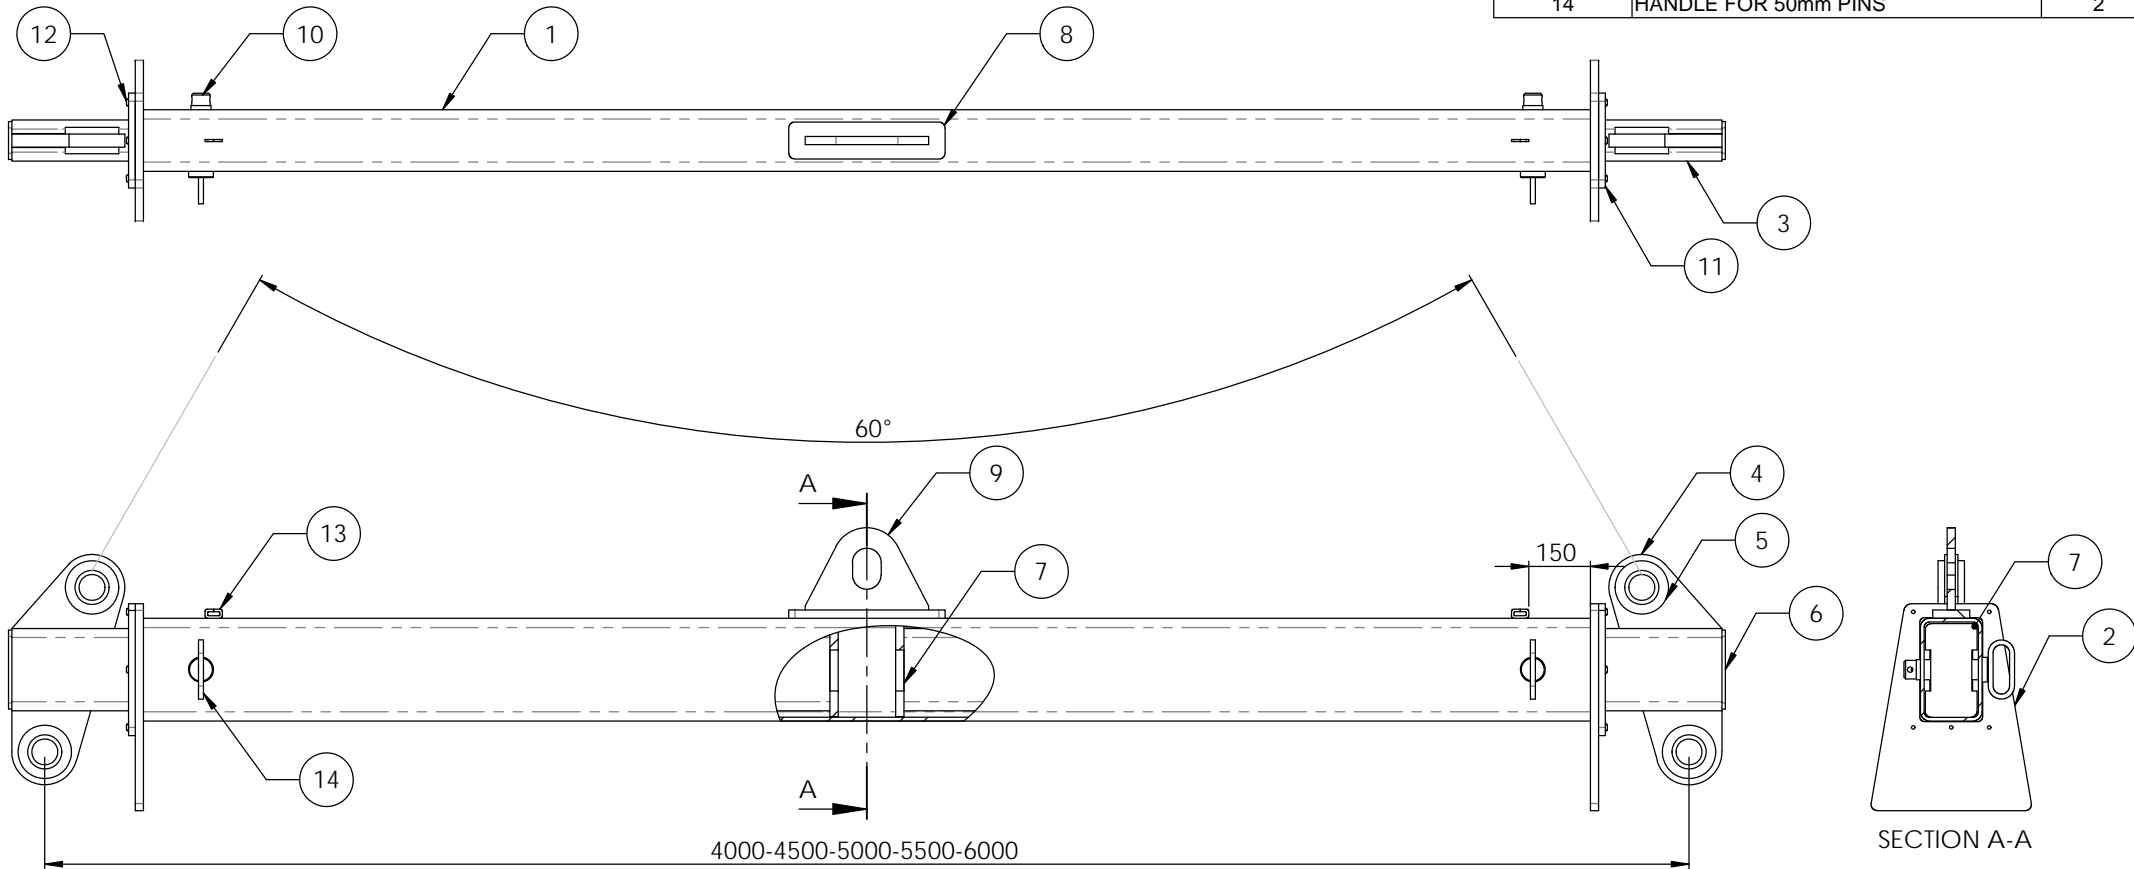

D.O.T.
ENGINEERING

1 / 57 PARAMOUNT DRV
WANGARA. 6065
WESTERN AUSTRALIA.

TEL: (08) 9302 4166

FAX: (08) 9302 4099

THIS DRAWING AND THE INFORMATION ON IT
REMAINS THE PROPERTY OF DOT ENGINEERING
WRITTEN PERMISSION MUST BE OBTAINED FROM
DOT ENGINEERING TO COPY OR REPRODUCE
THE WHOLE OR PART OF THIS DRAWING.

DRAWN	RM	TITLE	4-6m COMBINATION BEAM		
CHECKED		SIZE	60T WLL	SCALE	1:13
APPROVED		PROJECT	BEAMS	DWG	10265 - 1
				DATE	27-Mar-11
				REV	2